



Replacing Toyota seat lettering

My letters started falling off after four years. I purchased a replacement set from Toyota for 46\$. They are supposed to be applied with an iron from the BACK side. The letters have a hot melt glue on the back. I decided to try using DAP contact cement, applied very carefully with a wooden skewer to both the seat back and the letters.




The letters are attached to a plastic strip, and could be applied all at once.



Mask off the seat, contact cement makes a mess.



It takes some time to apply the cement without making a mess. Let the glue tack up on both the seat and the letters

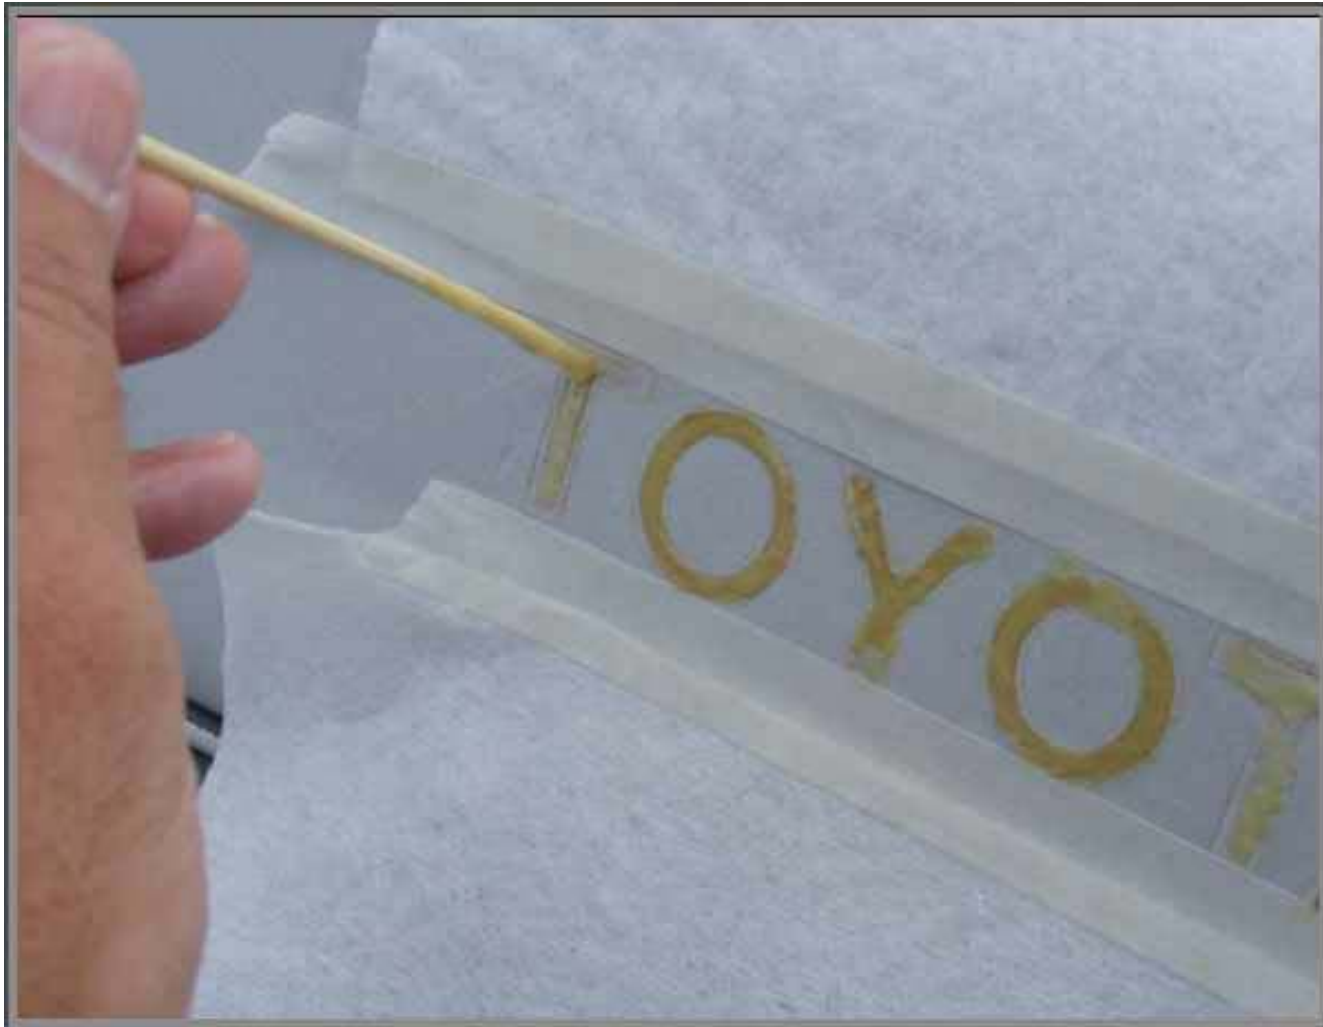

I pressed the letters on one at a time, the bond is instant. They are a little bit crooked, I think I would try to apply all at the same time were I to do it again. My letters have remained attached all summer, 150+ hours.

